



Parameters

Frequency range:	100 kHz – 1 GHz
Internal attenuation:	10 dB
Max. continuous current:	10 A
Max. operating voltage:	50 V
DC-resistor:	< 20 m Ω
Measuring channel:	2, one can be disabled

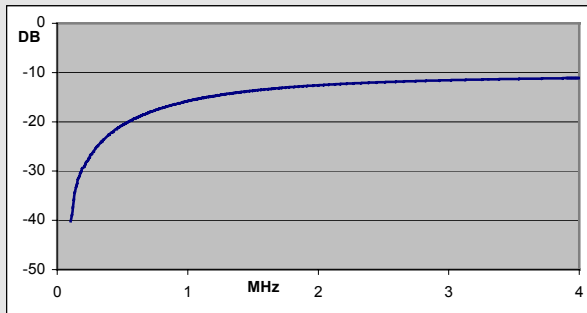

Frequency range

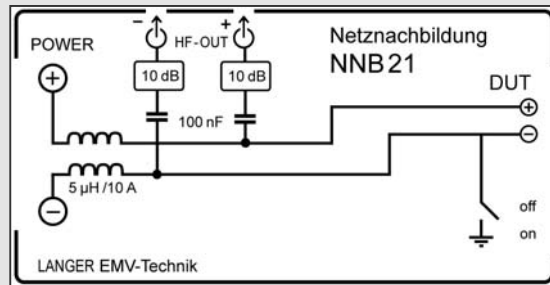