

Delivery content

- 1x ICI-DP 3HC150-15

1x BPS 204-Client

1x SK FI-FI mini 7P 1 m

1x NT FRI EU 24V

1x ICI-DP case

1x ICI-DP qg
- 1x BPS 204

1x HV FI-FI mini 1 m, 高压电缆

1x SMA-SSMB 1 m

1x USB-AB

1x ICI-DP set m


Technical parameters

探头尺寸	Ø 150 µm
脉冲参数	
上升时间	2 ns
	25 ns (200 V)
极性 (set by software)	+ / - (no polarity change within a double pulse)
电压	50 - 1000 V
max. Jitter (typ.)	± 1 ns
Min. trigger pulse delay	35 ns


Contents of the case ICI-DP HH150-15 set



Schematic set-up with mover

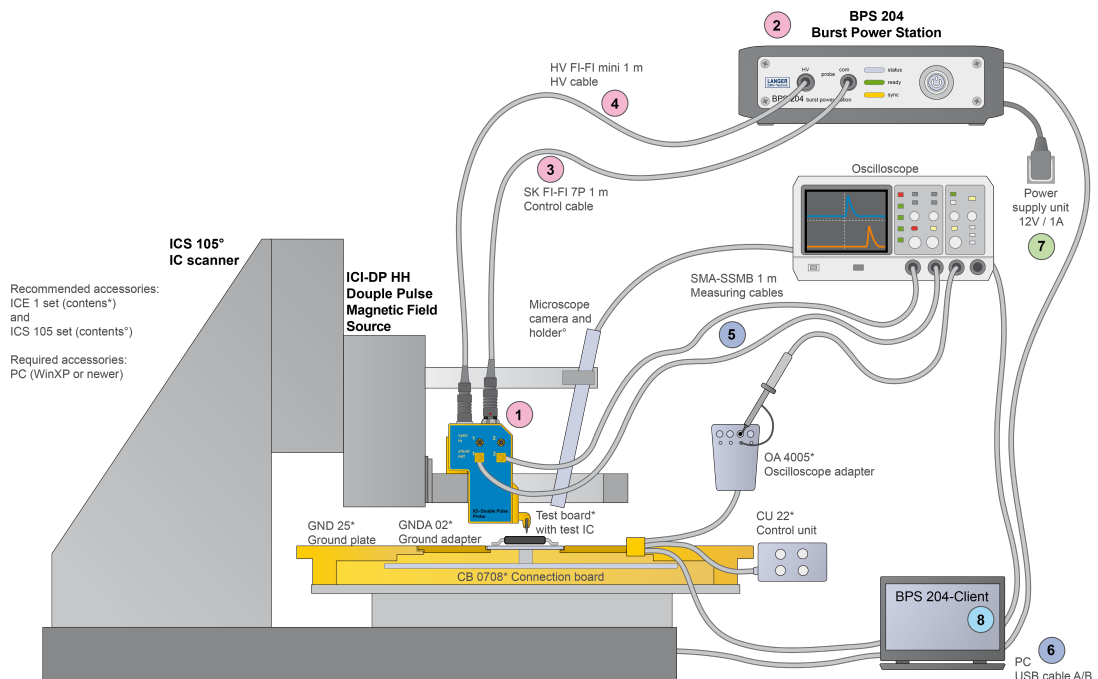

Fault injection measuring station with Langer IC scanner

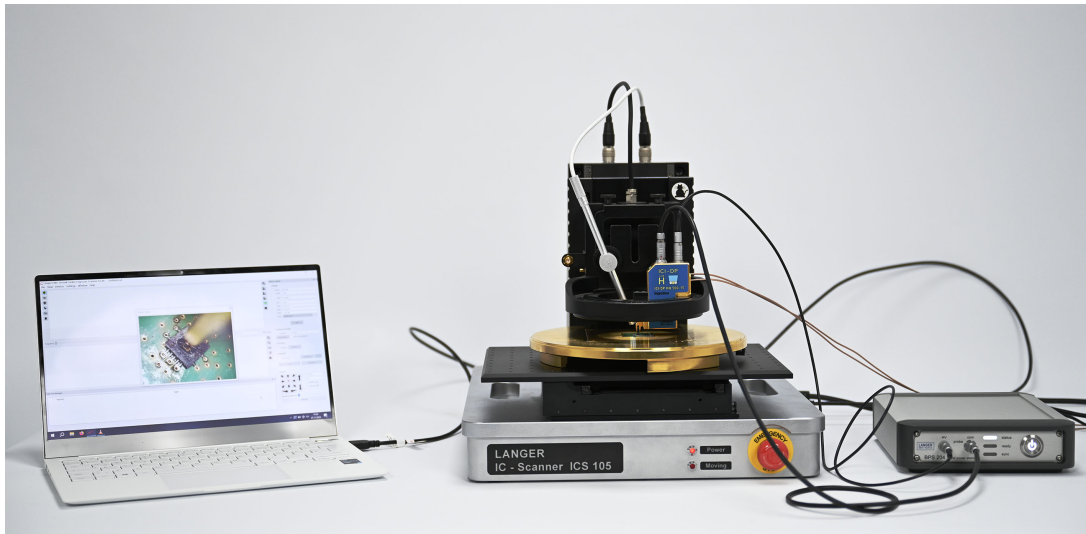

Scope of delivery

