

ICR HH250-75 set



Delivery content



- 1x ICR HH250-75, 近场微探头 (0.5MHz--2GHz)
- 1x BT 706, T型偏置器
- 1x SMA-SMA RA
- 1x ICR-C
- 1x ICR Corr
- 1x NT FRI EU
- 1x ICR case1, System case

Technical parameters

频率范围	500 kHz ... 2 GHz
分辨率	150 μm
内径	250 μm

ICR HH250-75 set


频率特性

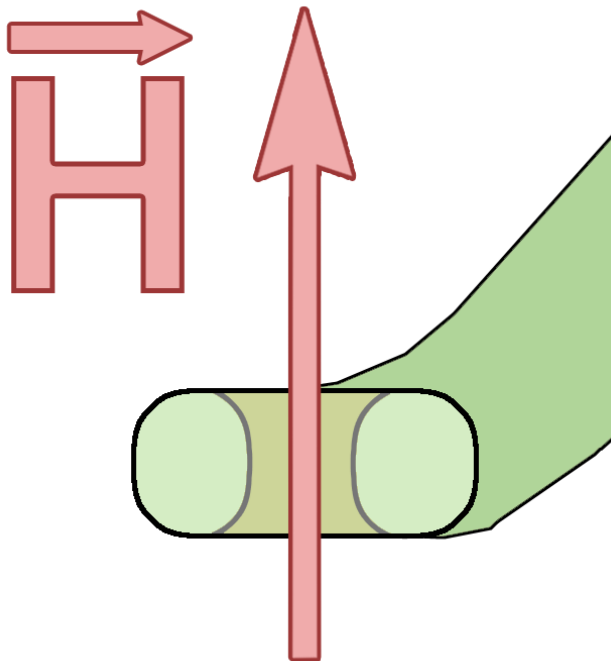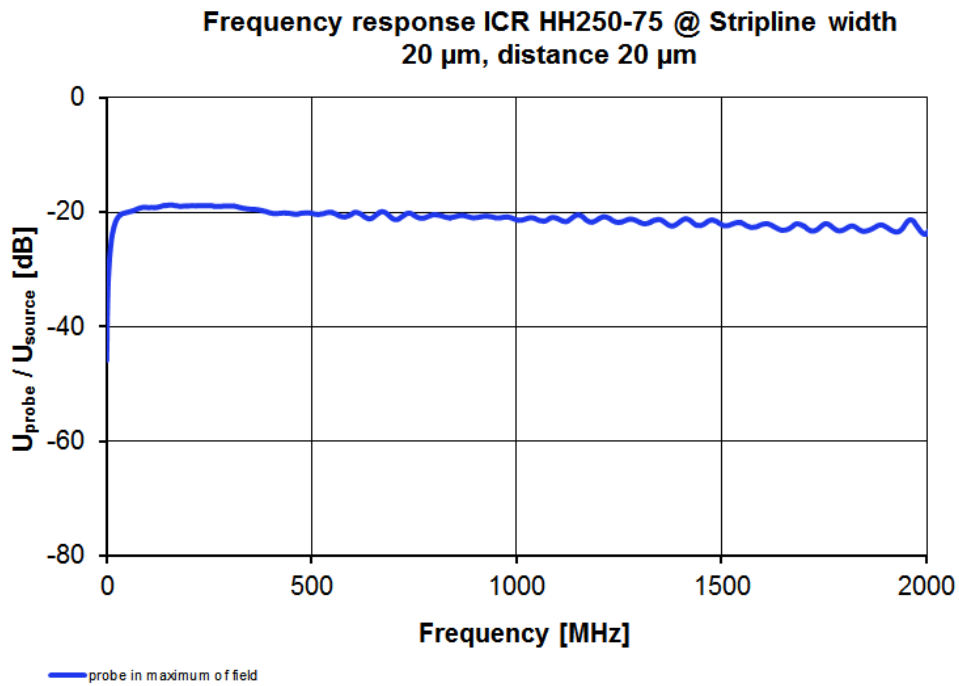

ICR HH250-75 set


安装视图 01

Stripline

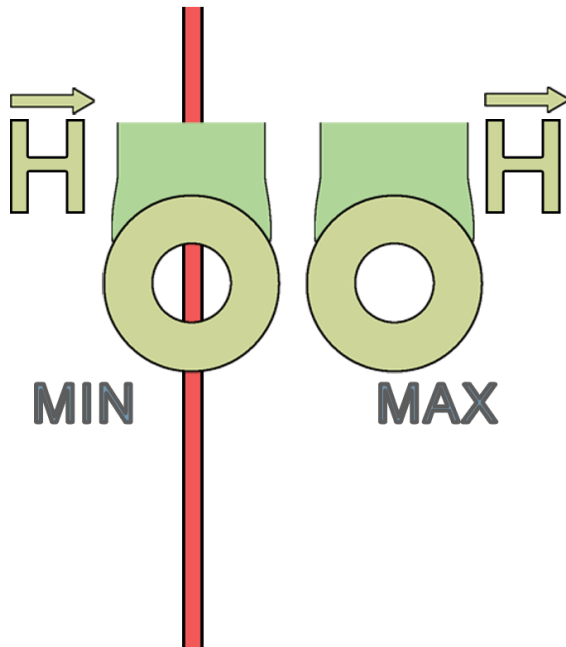


安装视图 02

Stripline

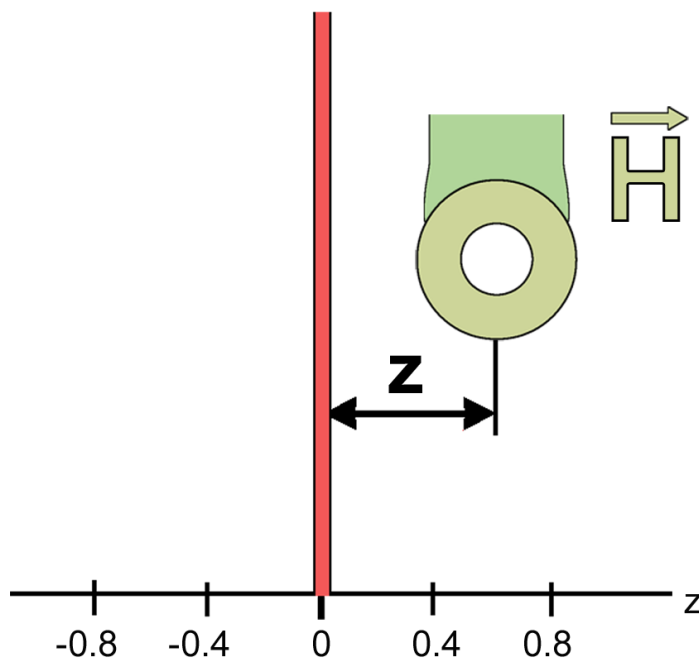

ICR HH250-75 set

横截面

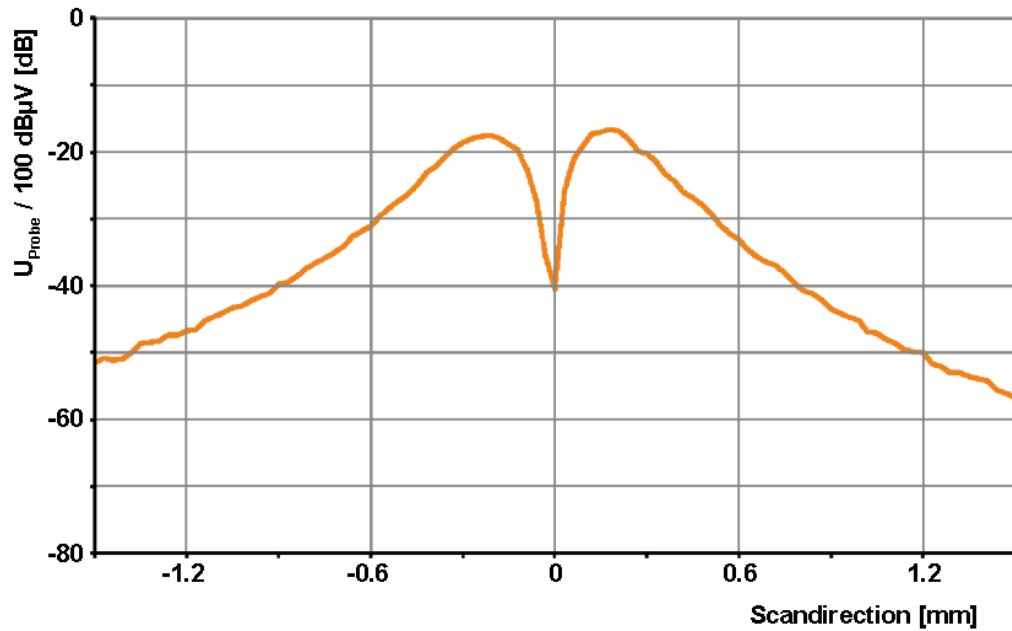


ICR HH250-75



ICR HH250-75 set

BT 706 bias tee

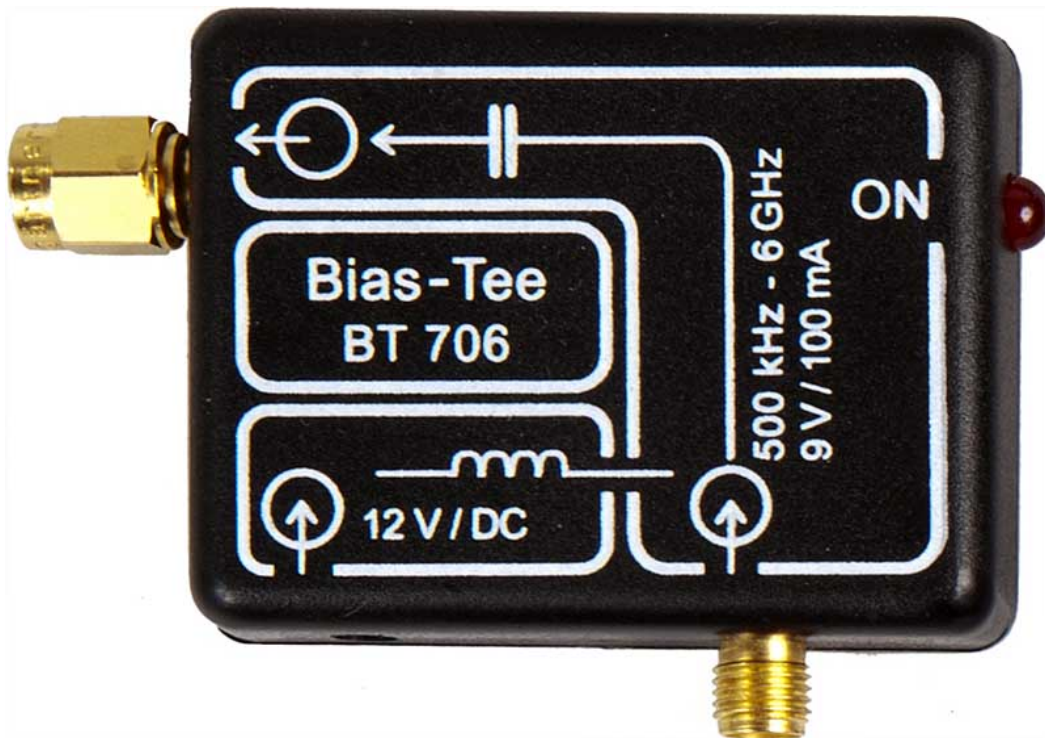

Scope of delivery

