

# H5-IC set

电快速瞬变脉冲群磁场源组




## Delivery content

- 1x BS 06DU-s, 电快速瞬变脉冲群IC-磁场源
- 1x HV FI-SMB 1 m, SMB 高压电缆
- 1x H5-IC case
- 1x H5-IC m

## Technical parameters

BS 06DU-s 电快速瞬变脉冲群磁场源	
探头尺寸	(5 x 6) mm
频率范围	0...560 MHz
生成的最大磁感应强度	150 mT
Waveform of the injected test pulse	IEC 61000-4-4
输出接口	SMB, female, jack
尺寸 (L x W x H)	(140 x 8 x 8) mm
重量	15 g
	4 kV

Principle of application with BS 06DU-s magnetic field source

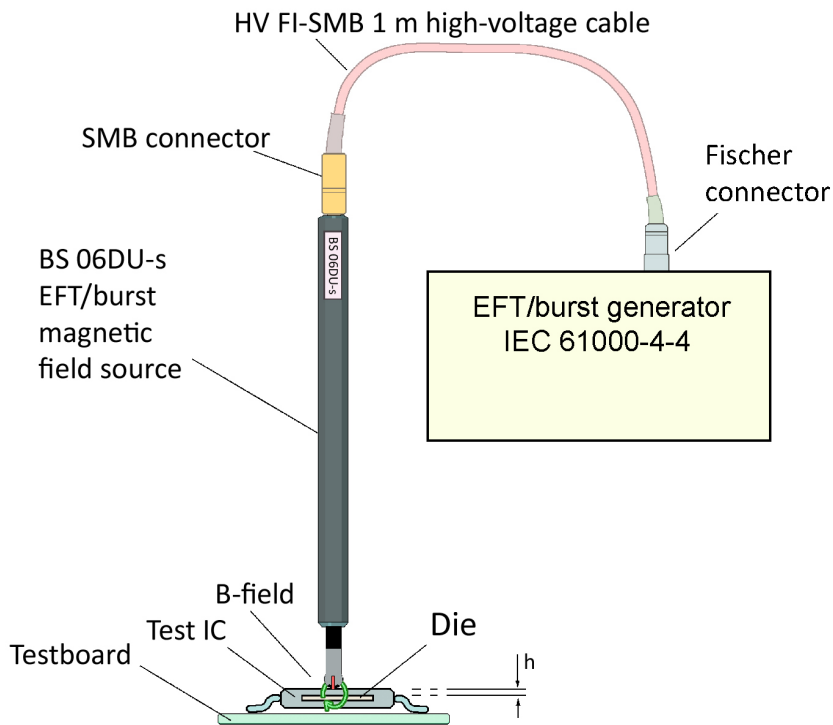

Fischer connector and SHV connector



Scope of delivery with BS 06DU-s and HV SHV-SMB 1 m cable



Scope of delivery with BS 06DU-s and HV FI-SMB 1 m cable

