


PA 306 SMA

前置放大器 (100 kHz-6 GHz)

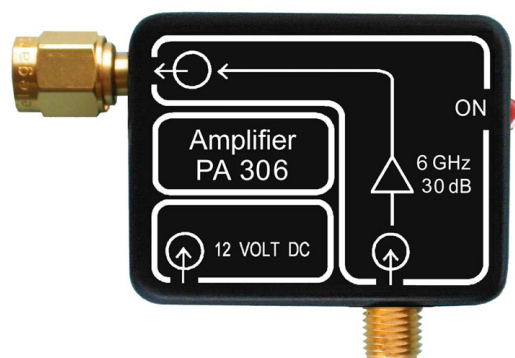

Short description

PA306型前置放大器用于放大测量信号，例如高分辨率的近场探头的微弱信号。PA 306与频谱分析仪或示波器的50欧姆输入端相连，并由自带的电源适配器供电。

The PA 306 is to be used with the 50 Ω input of a spectrum analyzer or oscilloscope. The power is supplied to the PA 306 via the plug-in power supply unit. A near-field probe is connected to the input of the preamplifier with the corresponding cable.

Technical parameters

频率范围	100 kHz - 6 GHz
放大	30 dB
1分贝压缩点	10 dBm
噪声系数	3 dB
电源电压	12 V DC
电流输入	100 mA
最大输入功率	+13 dBm
重量	50 g
尺寸 (L x W x H)	(50 x 38 x 13) mm

PA 306 SMA

前置放大器 (100 kHz-6 GHz)

频率特性

