


RFS-R 50

扫描探头 (30MHz - 3GHz)

LANGER
EMV-Technik

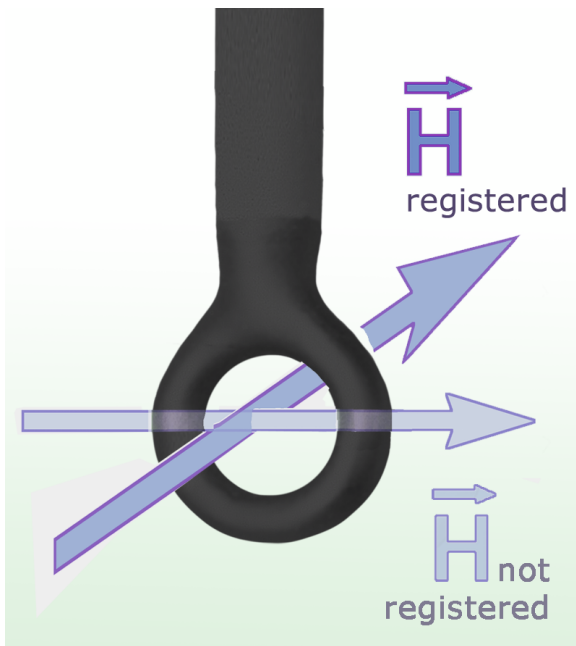

Short description


LF-R 50型磁场探头适用于检测约3cm范围内的组装件、设备或电缆。这种磁场探头会把较大的元件识别为干扰源。

The RFS-R 50 is a passive near-field probe. It has a sheath current attenuation and is electrically shielded. It can be connected to a spectrum analyzer or an oscilloscope with a 50 Ω input. It does not have an internal terminating resistance.

Technical parameters

频率范围	30 MHz ... 3 GHz
探头尺寸	Ø 10 mm
输出接口	SMA, male, plug
长度	≈ 55 mm

频率特性

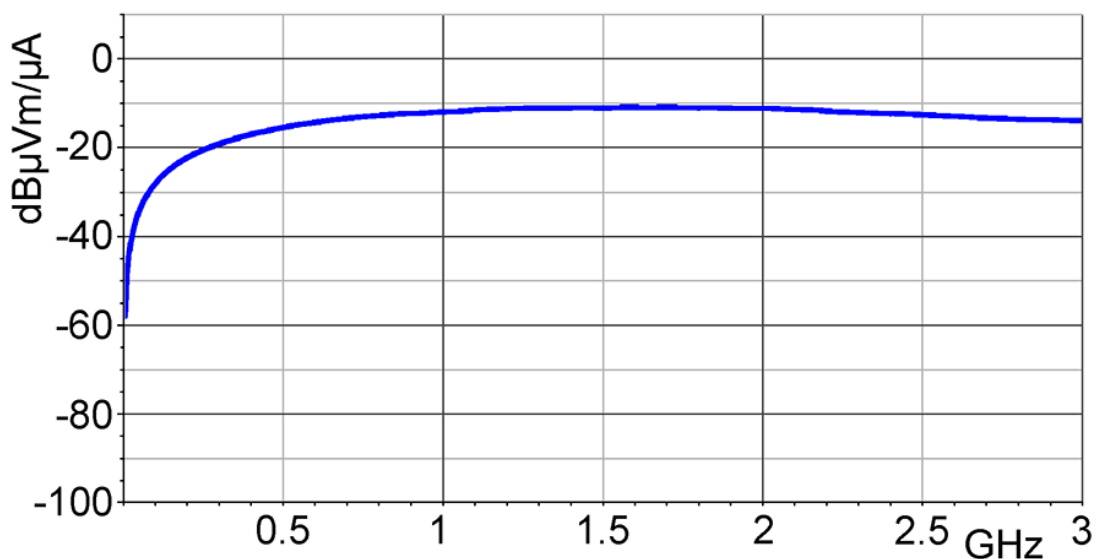


RFS-R 50


扫描探头 (30MHz - 3GHz)

LANGER
EMV-Technik

磁场校正曲线 [dB μ A/m] / [dB μ V]

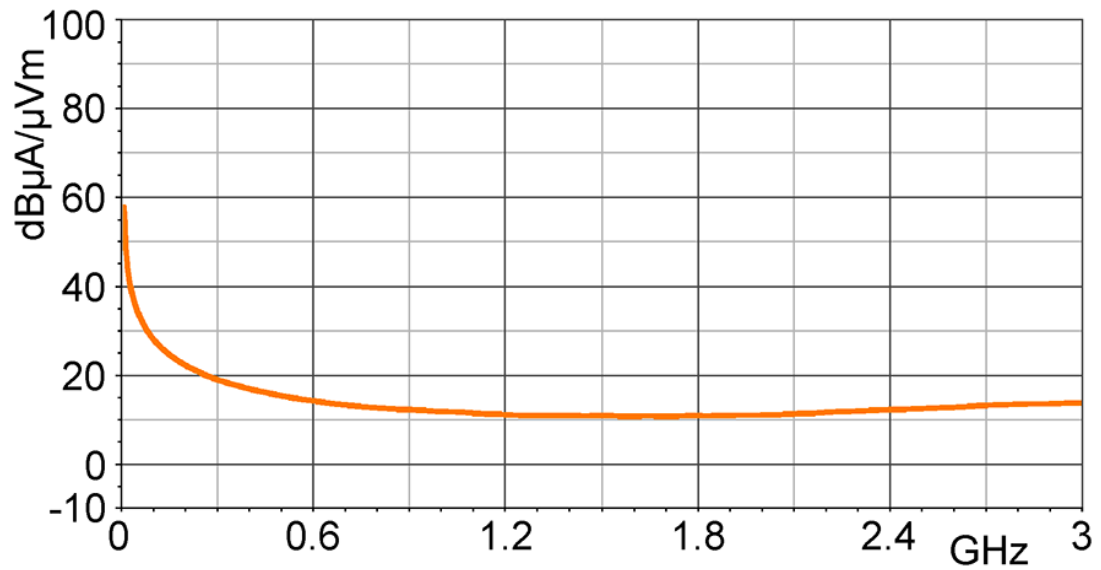

电流校正曲线 [dB μ A] / [dB μ V]

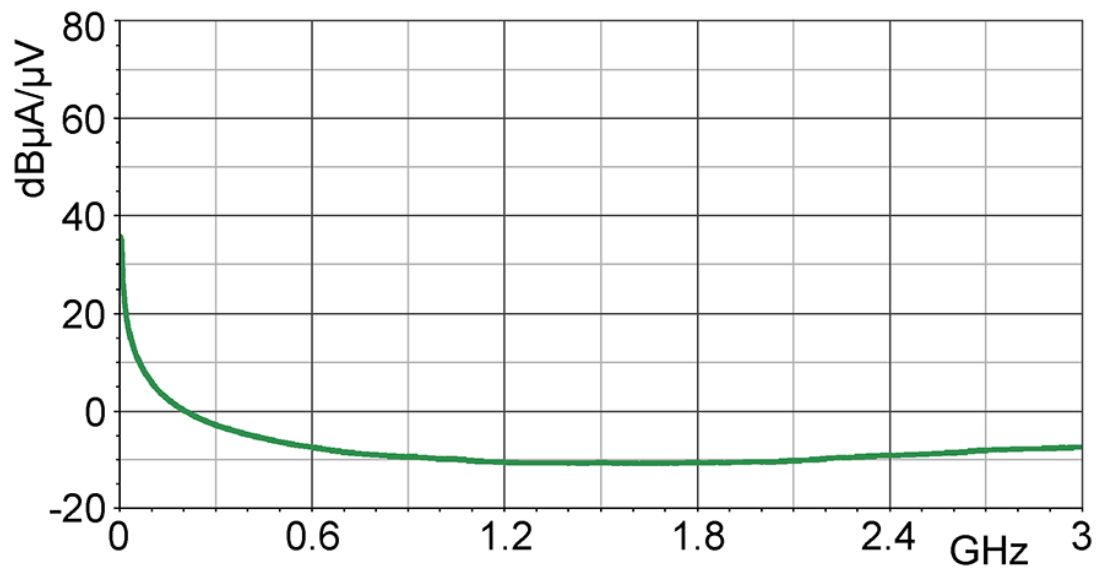

RFS-R 50

扫描探头 (30MHz - 3GHz)

LANGER
EMV-Technik

