

ICI 01 L-EFT set

IC EM Pulse Injection Langer Pulse

LANGER
EMV-Technik



Short description

The ICI 01 L-EFT set includes one of our ICI L-EFT sources. The sources couple fast transient pulses into test ICs. You can choose between electric, magnetic, and current sources. All sources allow for side channel analysis or testing the immunity of individual areas of ICs.


Scope of delivery

- 1x ICI Field Source, Choose your probes from our selection
- 1x BPS 202, Burst Power Station
- 1x BPS 202-Client, BPS 202-Client Software / USB
- 1x NT Ex EU, Power Supply Unit
- 1x ICI 01 L-EFT acc, Accessories
- 1x ICI case, System Case
- 1x ICI m, ICI Set User Manual


Technical parameters

Pulse parameter	
Rise time	< 2 ns
Repetition frequency	0.1 Hz - 20 kHz
Polarity (set by software)	+ / - / alternating
Trigger-pulse delay (Bypass Mode - Delay Line)	
min. Trigger-pulse delay (typ.)	100 ns
max. Trigger-pulse delay (typ.)	450 ns
max. Jitter (typ.)	± 1 ns
Trigger-pulse delay (Timer Mode)	
min. Trigger-pulse delay (typ.)	200 ns
max. Trigger-pulse delay (typ.)	100 ms
max. Jitter (typ.)	± 15 ns
Trigger delay, min. increment	10 ns
Supply voltage	BPS 202
Software	BPS 202-Client / DLL (32 Bit / 64 Bit) Win XP SP3 or higher

Schematic set-up with ICI HH500-15 pulse magnetic field source (the devices marked with * are not included in the scope of delivery)

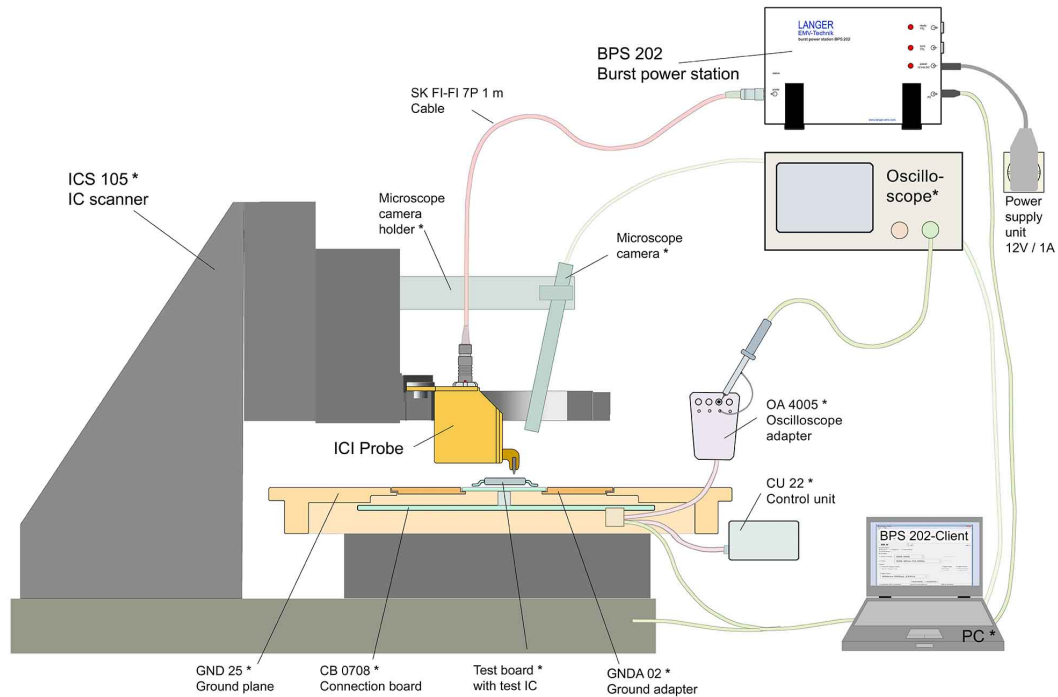

Schema of set-up

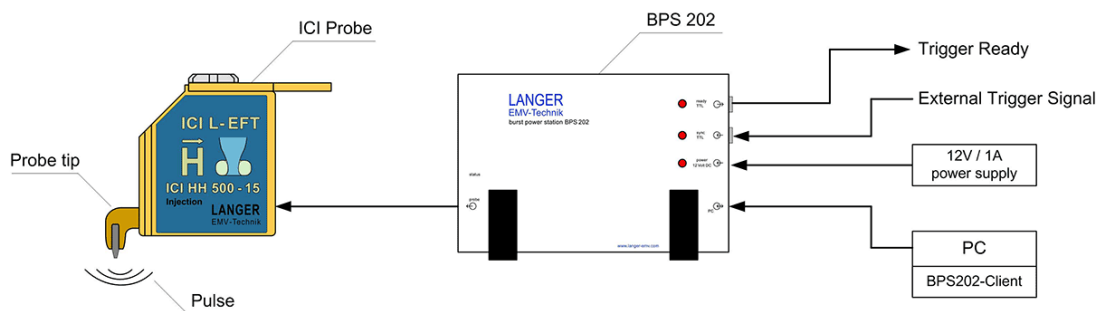

ICI 01 L-EFT set

IC EM Pulse Injection Langer Pulse

ICI probe in application

