


Short description


With the ES 01-h E field source extensive electrical couplings are possible. The field source is suitable for pulsing weak spots from a range of 5 to 10 cm. Its radius of function is between that of the ES 02-h and ES 00-h field sources.

The field source is powered by an EFT/burst generator or TS 23 Pulse Generator. The generator is connected to the 4.4 kV, high voltage resistant SMB plug of the field source via a high-voltage cable (HV SMB 1 m, SMB-BNC 1 m, or GK 0.7 m SMB-SMB).

Measuring principles

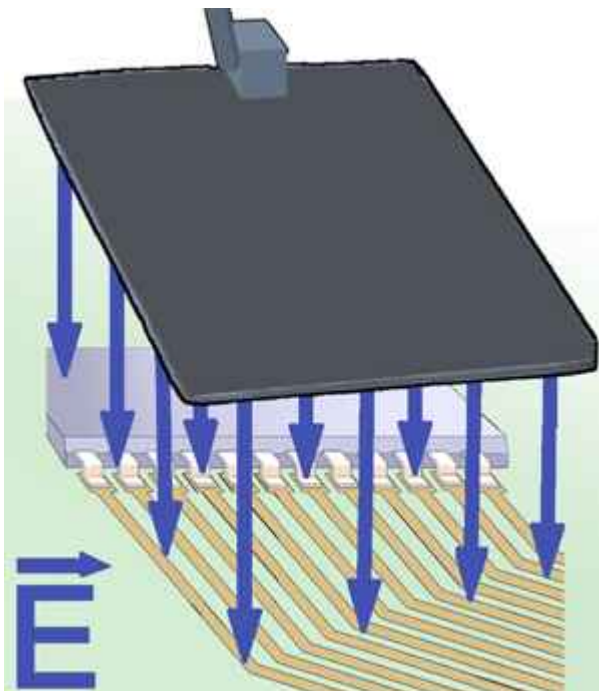

Application with ES 01

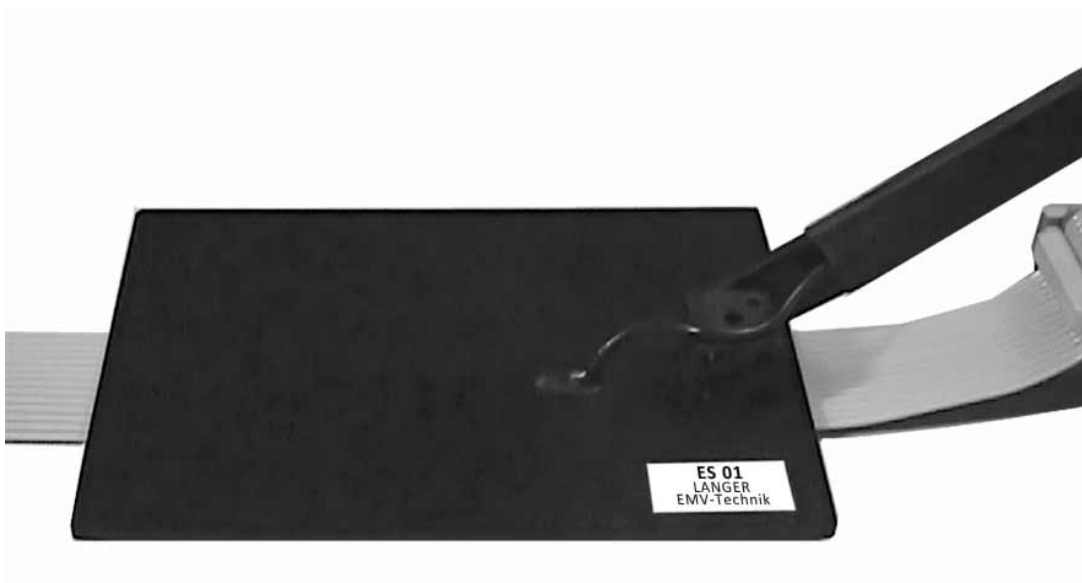

ES 01-h

