

A200-2 set

Optical Fiber Probe 2-Channel, 500 kHz

LANGER
EMV-Technik



Short description

The A200-2 set consists of two sensors which allow for potential free transmission of analog signals under EFT/ESD/RF interference. The signals are displayed on an oscilloscope. Disturbed signals can be easily detected. In the device under test the sensor transforms the measured logic signals into optical signals. The optical signals are transmitted via a fiber optical cable to the optical receiver which transforms them into electrical signals. These can be seen with an oscilloscope or can be used for controlling other devices. The system is suitable for monitoring signals or devices under test in an anechoic chamber or for EMC optimizing of hard- and software.

Scope of delivery

- 2x AE 200, Optical Receiver
- 2x AS 200, Optical Sensor (50 / 10) V DC
- 2x LWL Ø 2.2 mm 6 m, Optical Fiber, Single 6 m
- 1x NT FRI EU, Power Supply Unit
- 1x A200-2 acc, Accessories
- 1x A200-2 case, System Case
- 1x Analog m, User Manual

A200-2 set

Optical Fiber Probe 2-Channel, 500 kHz


Technical parameters

Bandwidth	DC ... 500 kHz
Sampling rate	3 Msps
Resolution	12 Bit
AE 200 Optical Receiver	
Bandwidth	DC ... 500 kHz
Voltage range - output	0 V ... 10 V
Optical input: Optical fiber	Ø 2.2 mm
Supply voltage	12 V ... 16 V
Current input	≈ 100 mA
AS 200 Optical Sensor	
Bandwidth	DC ... 500 kHz
Measuring range	0 V ... 50 V / 0 V ... 10 V DC (switchable)
Input resistance	100 kΩ
Radiated immunity	> 100 V/m
Supply voltage	3 V ... 16 V
Current input	≈ 30 mA
Optical fibre length	1 m ... 20 m

A200-2 set

Optical Fiber Probe 2-Channel, 500 kHz

Application with AS 200 set

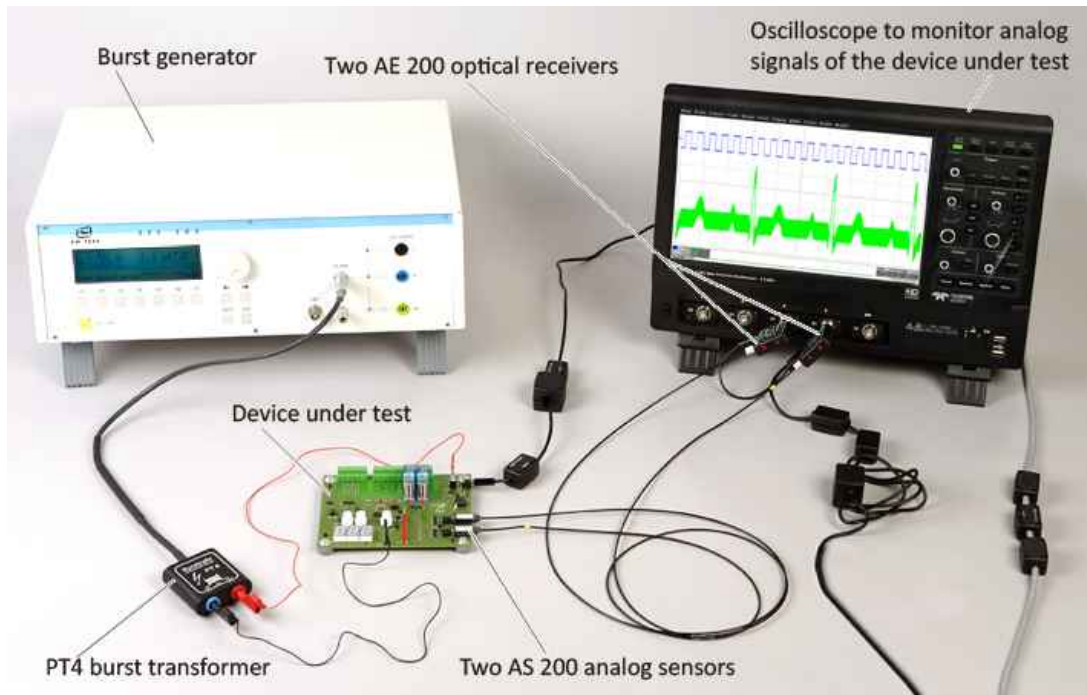

Application with AS 200 optical sensor



A200-2 set

Optical Fiber Probe 2-Channel, 500 kHz

Scope of delivery A200-2

