

P1502

RF E-Field Source up to 3 GHz



Short description

The P1502 RF E-field source tests the ICs in terms of their immunity under the influence of RF E-fields. The IC to be tested is tested while it is running.


The P1502 E-field source is operated in connection with a power amplifier and a RF signal generator.

Attention: The largest part of the fed power is reflected by the probe (no 50 Ω adaptation). The used power amplifier must be designed for it.

Technical parameters

Frequency range	(0 ... 3) GHz
Input impedance	5 k Ω
Generated electric field strength E (h = 10 mm)	14 kV/m
Generated electric field strength E	47 kV/m
Max. forward power	10 W (100 Watt on request)
Connector - input	N-Connector (50 Ω)
Weight	700 g
Sizes (L x W x H)	(180 x 96 x 96) mm

Frequency response

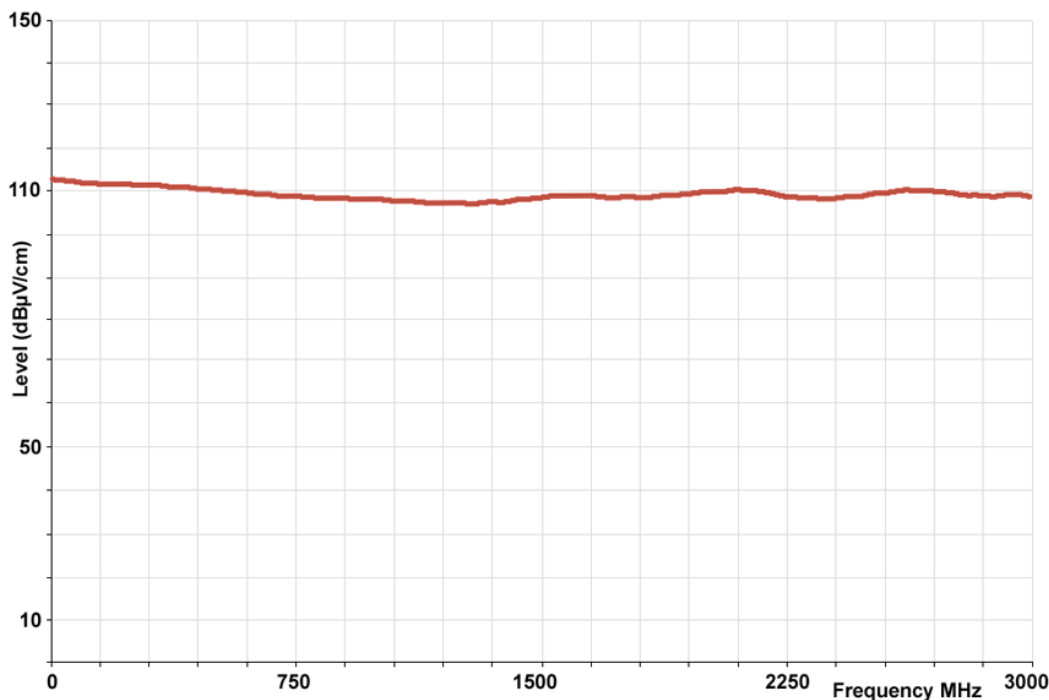

P1502

RF E-Field Source up to 3 GHz

Design, view 1

