

## A200-2 set



### Delivery content

- 2x AE 200, 光学接收器
- 2x AS 200, 光学传感器 (50 / 10) V DC
- 2x LWL Ø 2.2 mm 6 m, 6m 光纤
- 1x NT FRI EU
- 1x A200-2 acc
- 1x A200-2 case, System case
- 1x Analog m, A100-1系列 操作指南


## A200-2 set

### Technical parameters

带宽	DC ... 500 kHz
采样率	3 Msps
分辨率	12 Bit
<b>AE 200 光学接收器</b>	
带宽	DC ... 500 kHz
输出电压范围	0 V ... 10 V
光学输入: 光纤	Ø 2.2 mm
电源电压	12 V ... 16 V
电流输入	≈ 100 mA
<b>AS 200 光学传感器</b>	
带宽	DC ... 500 kHz
测量范围	0 V ... 50 V / 0 V ... 10 V DC (switchable)
输入电阻	100 kΩ
抗辐射性	> 100 V/m
电源电压	3 V ... 16 V
电流输入	≈ 30 mA
光线长度	1 m ... 20 m

## A200-2 set

Application with AS 200 set

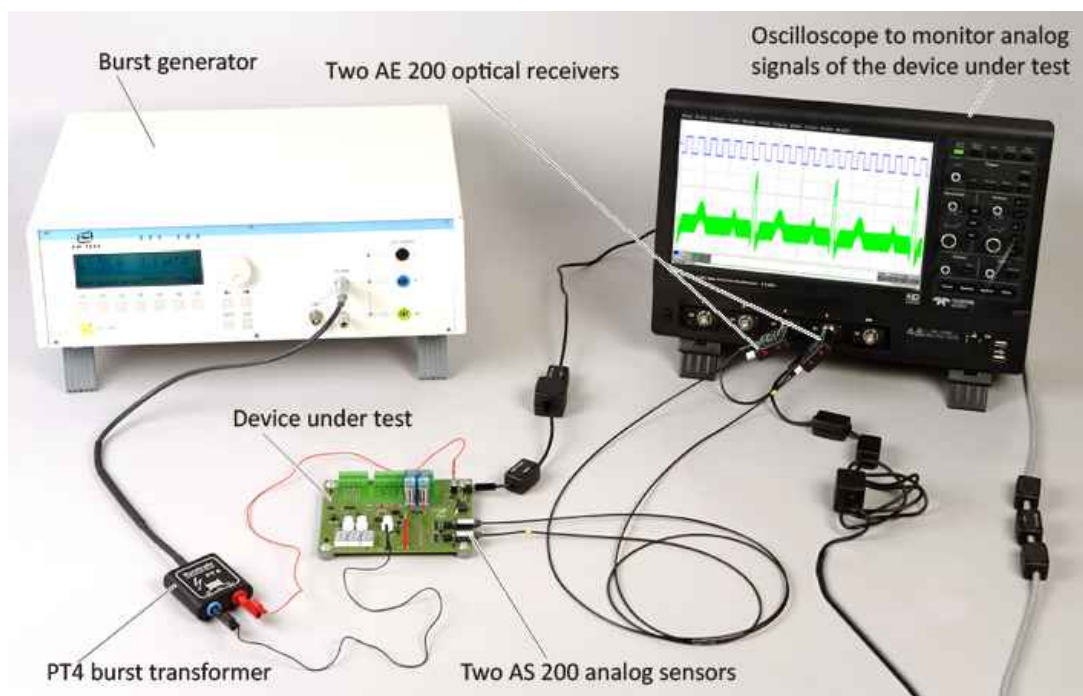

Application with AS 200 optical sensor



## A200-2 set

Scope of delivery A200-2

