

PA 3010 set

Preamplifier 10 MHz up to 10 GHz



Short description

The PA 3010 preamplifier was designed for the amplification of measuring signals, e.g. weak signals of near-field probes with high resolution. The PA 3010 is to be used with the 50 ohm input of a spectrum analyzer or an oscilloscope and is powered by the plug-in power supply. With the correct cable a near-field probe can be connected to the input of the preamplifier. Input and output of the PA 3010 are SMA connectors.

Scope of delivery

- 1x PA 3010, Preamplifier 10 MHz up to 10 GHz
- 1x NT FRI EU, Power Supply Unit
- 1x Case 5, System Case Near-Field Probes


Technical parameters

| | |
|-----------------|-----------------|
| Frequency range | 10 MHz - 10 GHz |
| Gain | 30 dB |
| Weight | 400 g |

PA 3010 set

Preamplifier 10 MHz up to 10 GHz

Measurement set-up with PA 3010

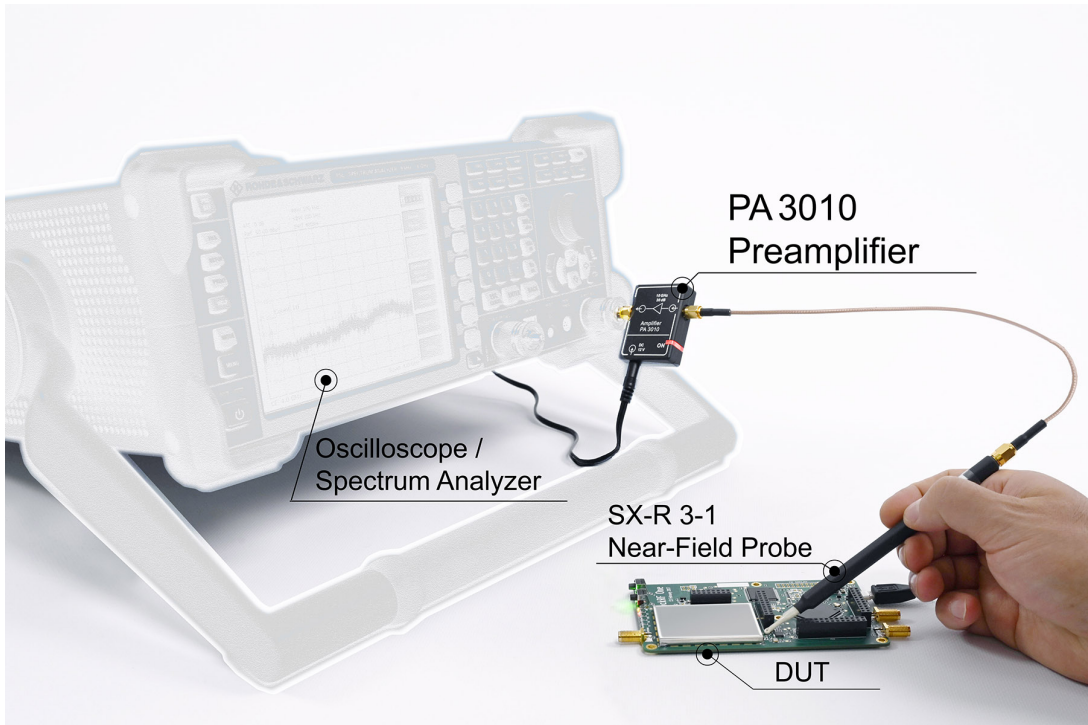

Scope of Delivery

